

Topic: How to Recover ME project from the MER file ver 4.0 or earlier

软件: Factorytalk ME 4.0 , Windows XP 32 位


问题: 当前的触摸屏固件版本为 4.0 或更早, 从触摸屏上上载一个*.MER 文件, 如何转换成编辑状态?

使用环境: FactoryTalk View/RSView Machine Edition versions: 1.00; 1.50; 2.00; 2.10; 3.00; 3.10; 3.20; 4.00

以下是实现步骤:


- 1、使用一台带有 WINDOWS XP 操作系统的电脑。
- 2、安装 FactoryTalk Machine Edition 4.0 版本软件
- 3、打开 ME 运行软件并加载当前的*.MER 文件:

C:\Program Files\Rockwell Software\RSView Enterprise\MERuntime.exe.

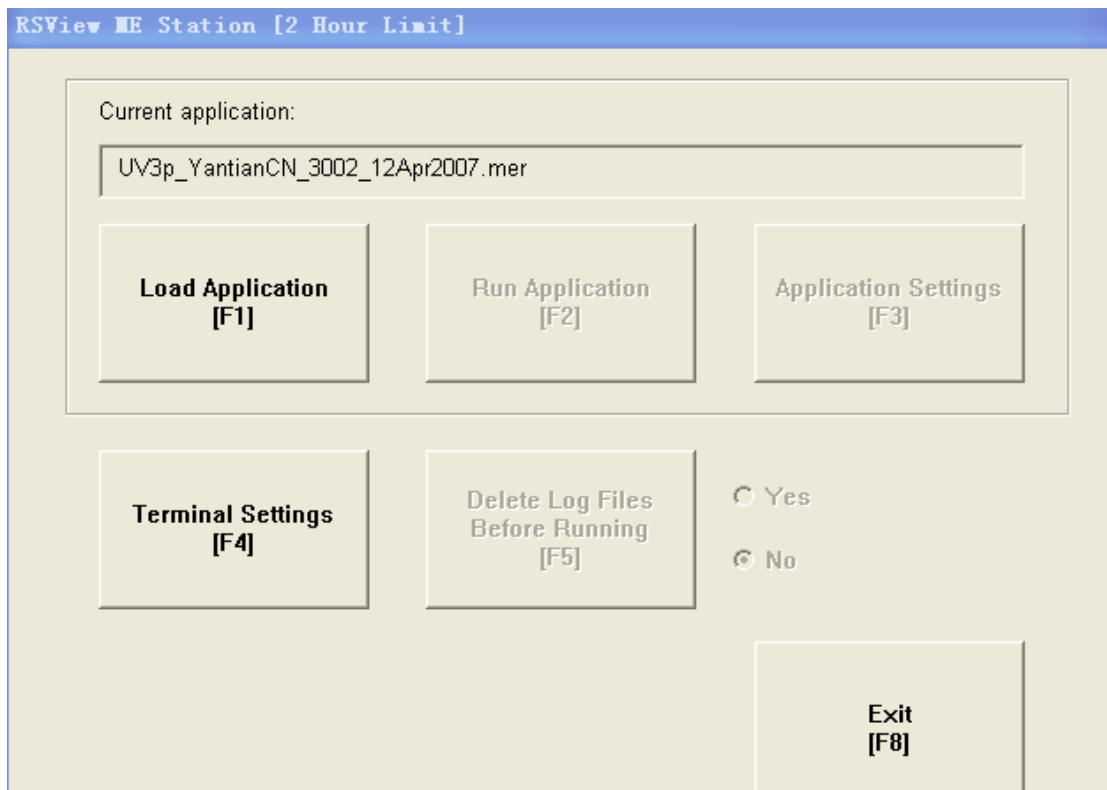


但是不要运行该应用。


- 4、在 C:\Documents and Settings\Administrator\Local Settings\Temp 目录下找到 ~MER.00 文件夹, 如图:

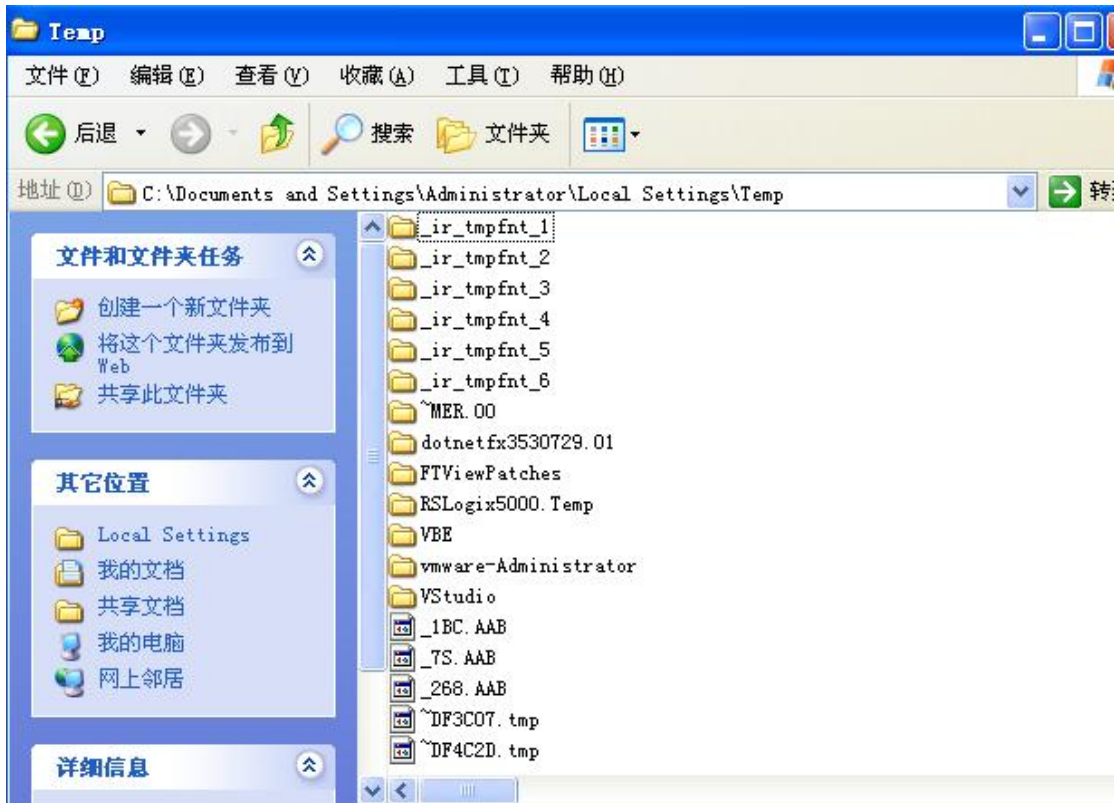



注：该文件夹是一个隐藏文件，需要在工具菜单中显示隐藏文件：

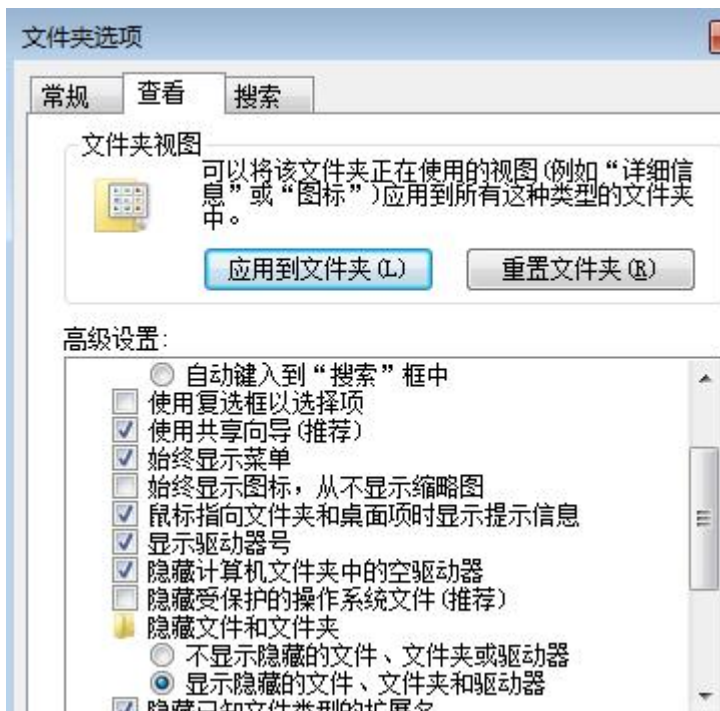


5、打开运行 FactoryTalk Machine Edition 开发软件，创建一个新项目应用，如图：

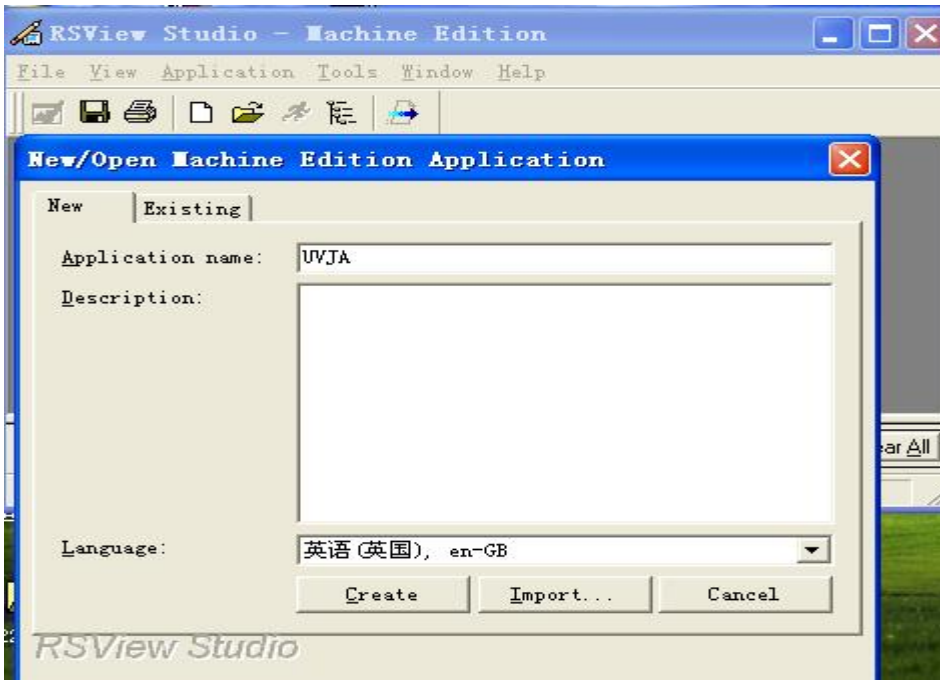


点击”Import”，选择”*.med”文件，点击刚才找到的~MER00 文件夹，找到当前的 *.MER 文件

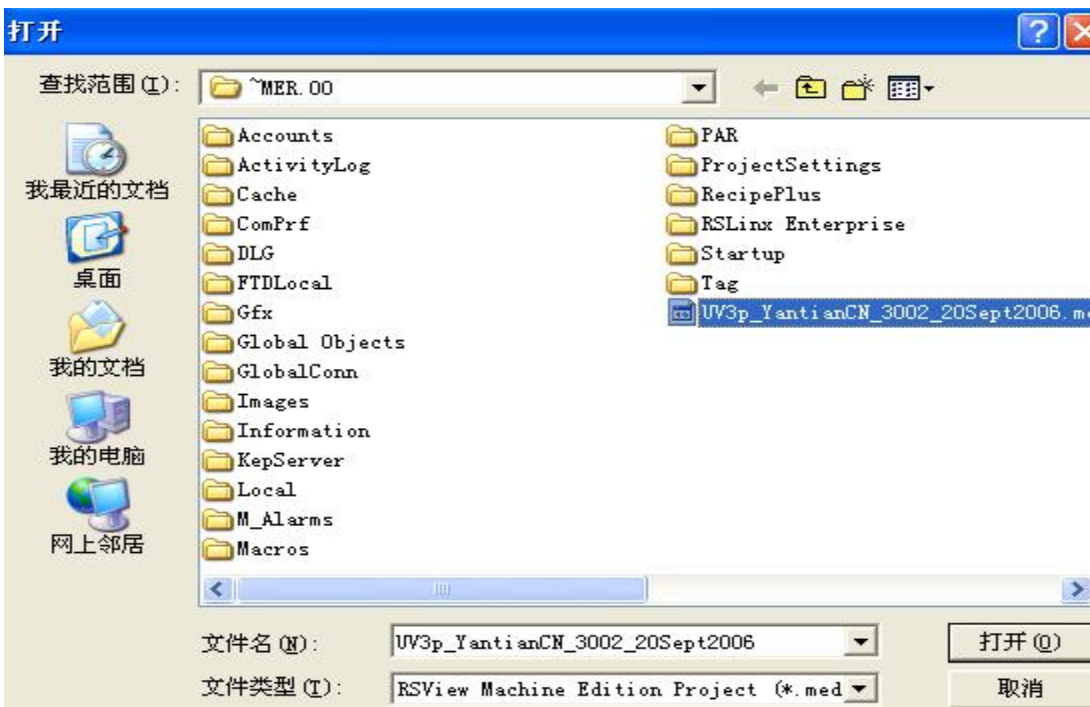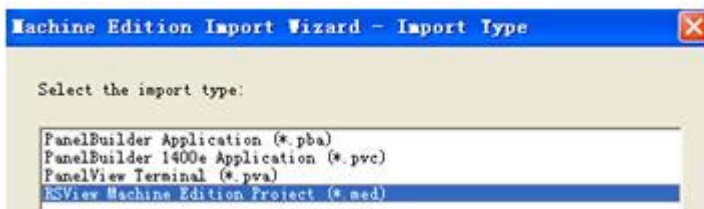

6、双击该 MED 文件，就可以在 ME 开发软件中打开该项目了。

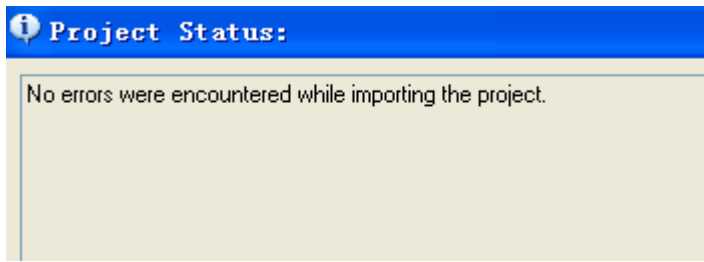

操作系统和 ME 开发包：

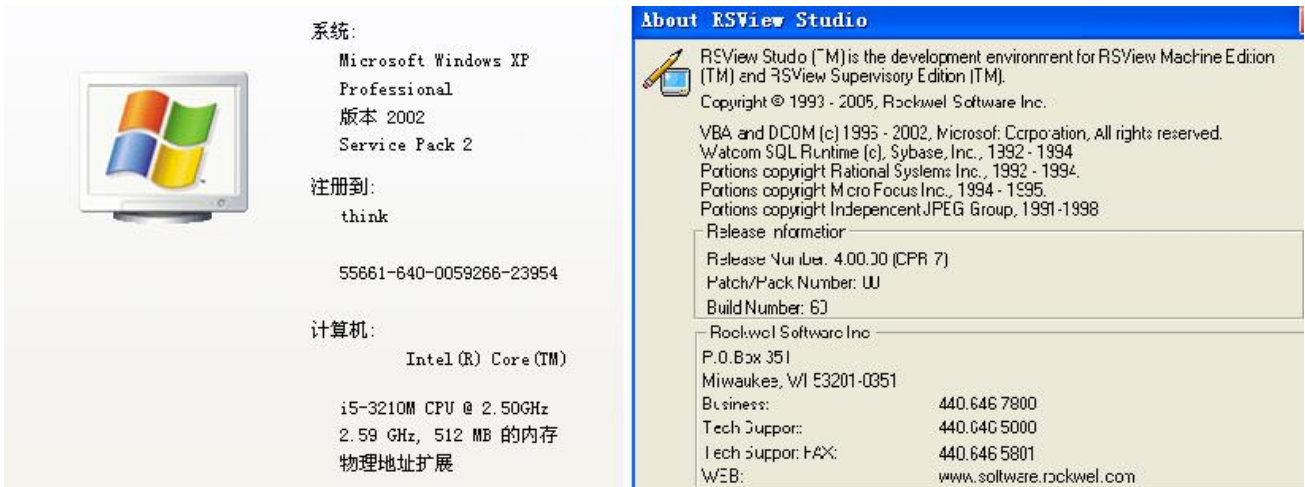

Reference:

A-B Knowledgebase NO: 8913 | Date Created: 02/07/2001 | Last Updated: 02/09/2018

Recovering a FactoryTalk View ME Project from the MER File version 4.0 or earlier

https://rockwellautomation.custhelp.com/app/answers/detail/a_id/8913/page/1

Author by Jackwell Cheung
Last Modified : 7th June, 2018
jackwellcheung@gmail.com

Copyright © 2018 Jackwell Automation. All rights reserved.